

BELT CONVEYOR

36' & 50' LOW PROFILE COMMODITY CONVEYOR



Capacity — Up to 4,000 bph (100 mth)

Complimented by Comparison.

Portable Belt Conveyor

36' & 50' LOW PROFILE COMMODITY CONVEYOR

Specifications

TUBULAR HOUSING:

BELT:

RECEIVING HOPPER:

DISCHARGE SPOUT:

DRIVE FOR 36' MODEL:

DRIVE FOR 50' MODEL:

OPERATING SPEED:

HORSEPOWER REQUIRED:

PRODUCT ADVANTAGES:


- 10" (25.4 cm) x 12 gauge galvanized.
- 15" (38.1 cm) Rubber continuous pattern with slider backing.
- Low profile transfer hopper style with collapsible spring supported canvas.
- Adjustable black plastic with 12" (30.5 cm) round outlet.
- Drive located at head end with snub pulley; electric or hydraulic.
- Electric "S" drive mounted in middle of conveyor.
- 560 feet per minute (171 mpm) and up for electric.
- 10 horsepower for 36' model and 15 horsepower for 50' model.
- Gentle handling to maintain seed quality.
- Exclusive belt alignment guide to maintain belt tracking.
- Capable of handling commodity products. Ideal for receiving from bin unloaders.
- Spring Loaded belt take-up to keep constant tension on conveyor belt.



SPRING LOADED TAKE-UP
(36' Model)




SPRING LOADED TAKE-UP
(50' Model)

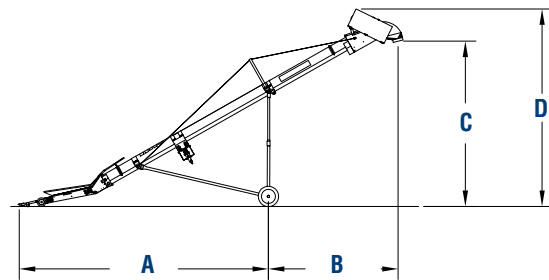

MAXIMUM INCLINE



BELT ALIGNMENT ROLLER GUIDE

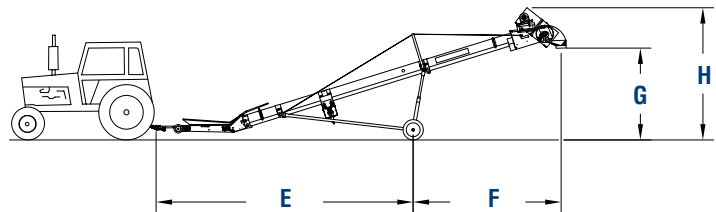

TRANSPORT POSITION



CANVAS HOPPER (35" X 65")

7 1/2" Hopper height with canvas in lowest position

MODEL	A	B	C	D	E	F	G	H
36'	22'-0"	12'-9"	16'-3"	19'-5"	25'-3"	14'-6"	9'-0"	13'-0"
50'	23'-5"	24'-5"	21'-5"	23'-8"	27'-0"	26'-5"	10'-9"	13'-5"

Call Toll-Free
1-800-523-6993
For more information.



HUTCHINSON/MAYRATH

A Division of **GLOBAL** Industries, Inc.

P.O. Box 629 • Clay Center, KS 67432
Ph. (785) 632-2161 • FAX (785) 632-5964
www.hutchinson-mayrath.com

Distributed by: